
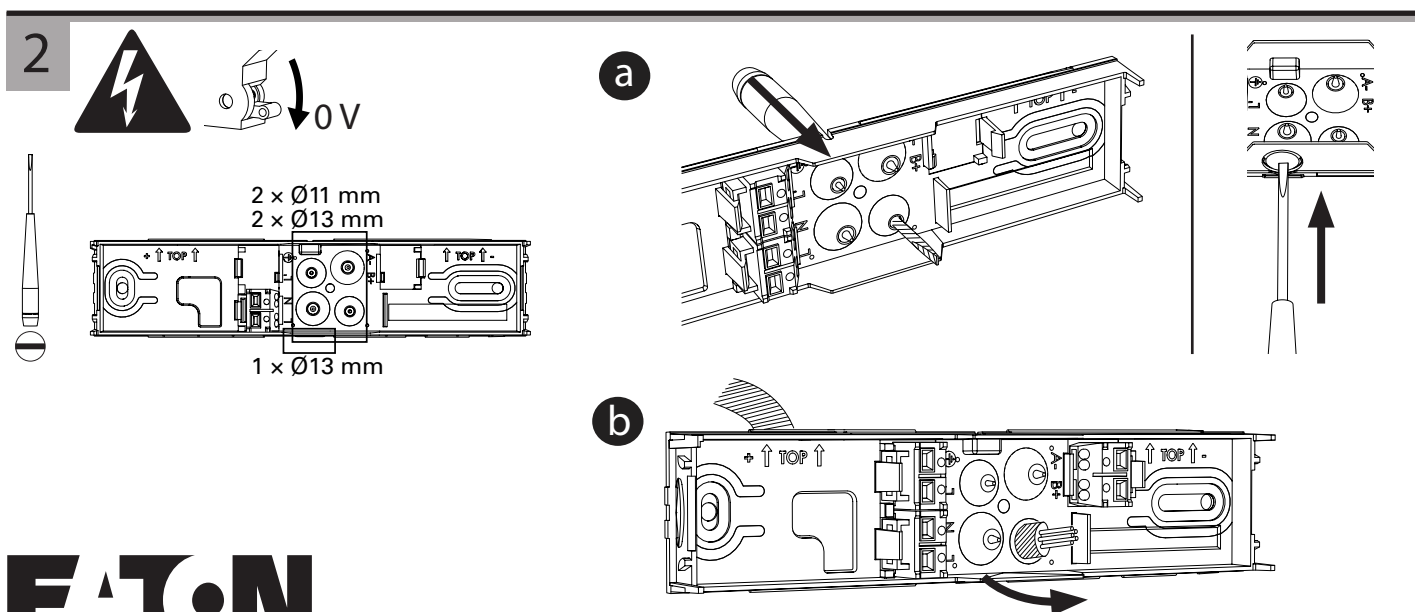
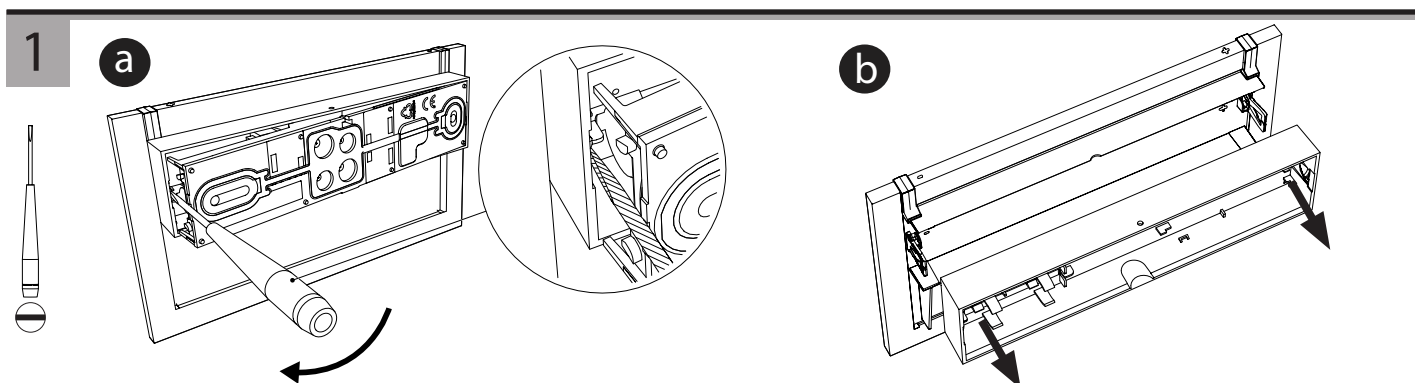
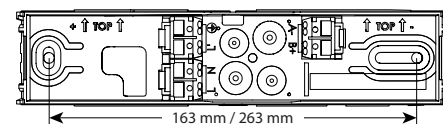



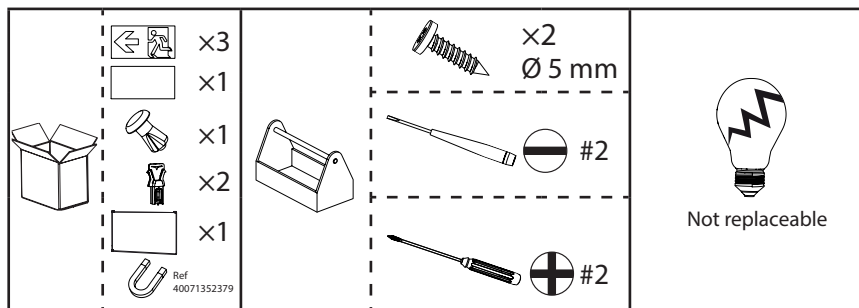



CrystalWay 20m/30m CGLine+

Self-contained luminaire


+ web-controller CGLine+



3

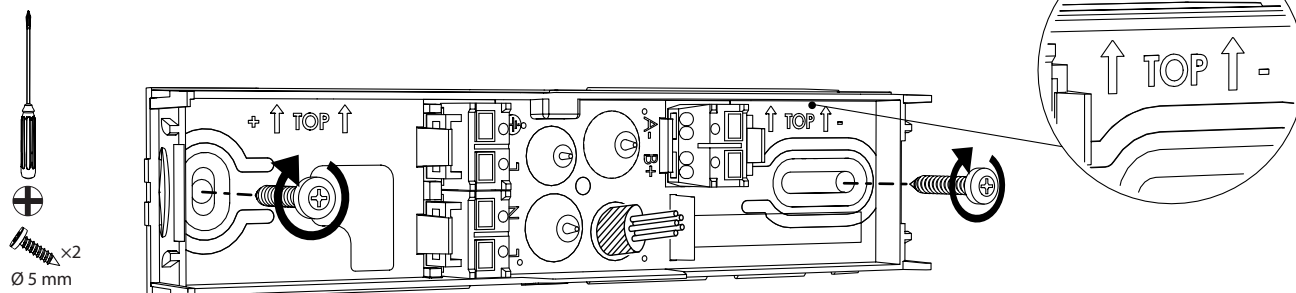


4

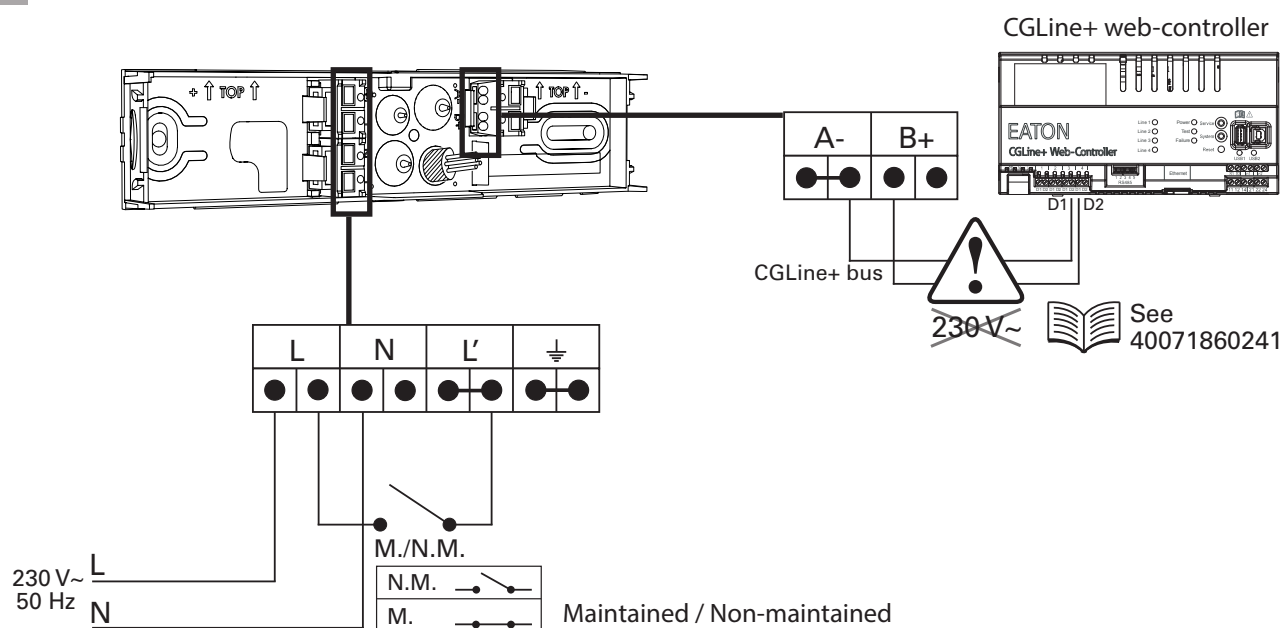


a

IN




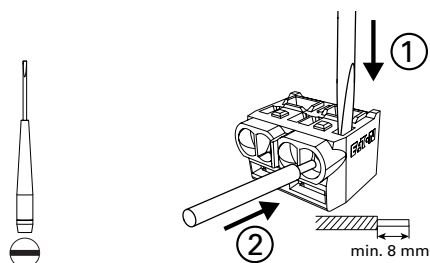


Rigid or flexible wire
 $0,5 < S < 2,5 \text{ mm}^2$


OUT



b

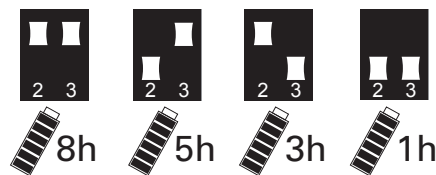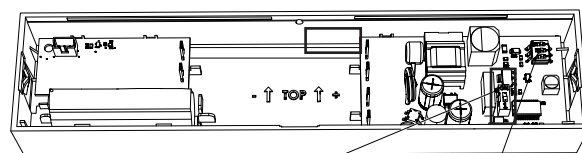

Tests (AT mode)



(By default)

Test at the same date for all luminaires




Test rescheduled of 7 days for some luminaires




c



Reset config.
after setting **b**

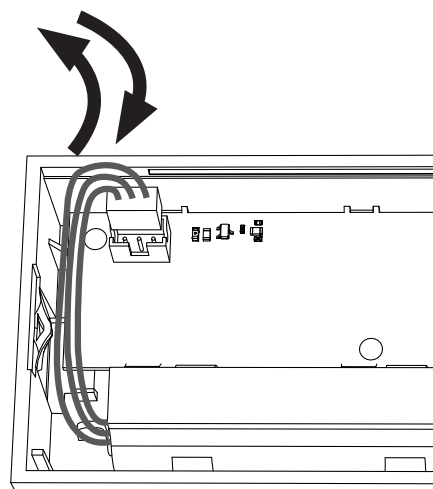


d

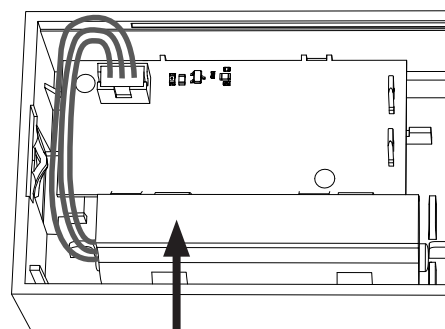


Installation date
jj/mm/aaaa

e

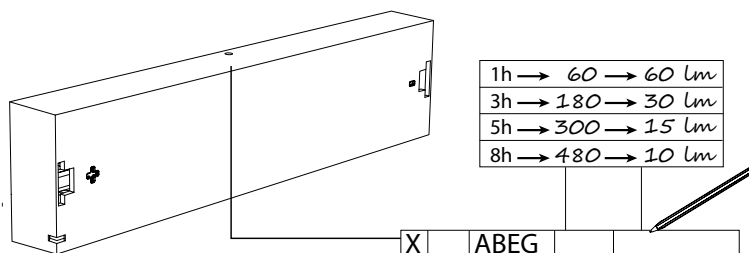


f

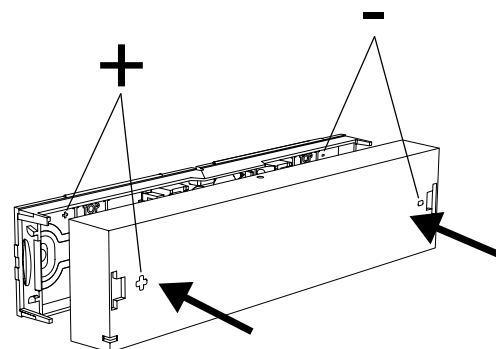








For modifying the light intensity ,
see "Manual testing and DIM level
setting", p.7.

5




Wall-mounting







(Ceiling-mounting: see next page)

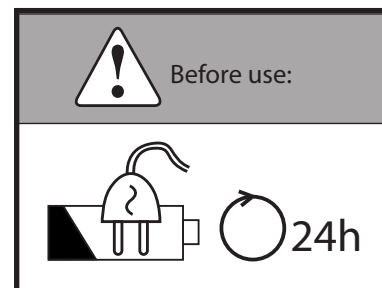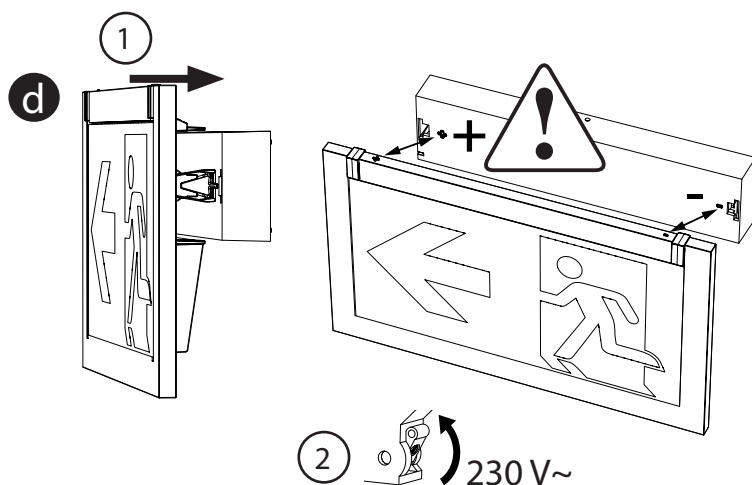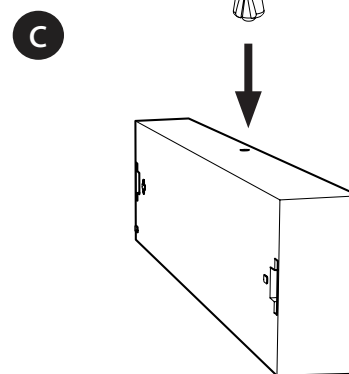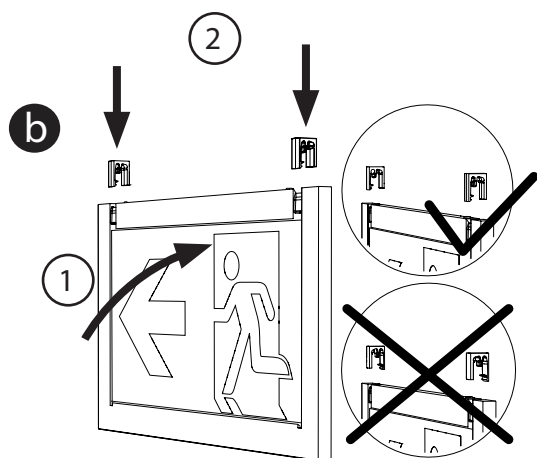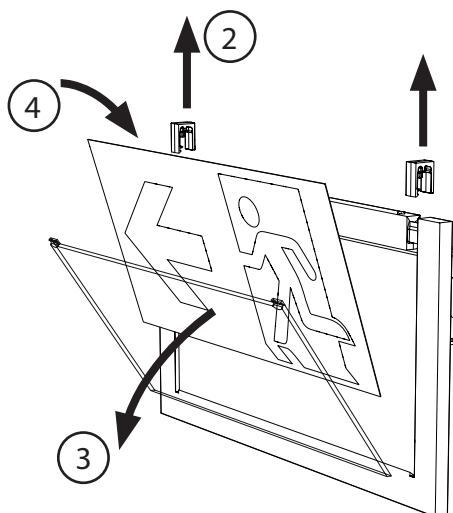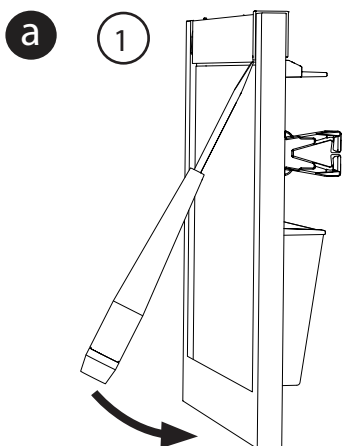

5




Ceiling-mounting

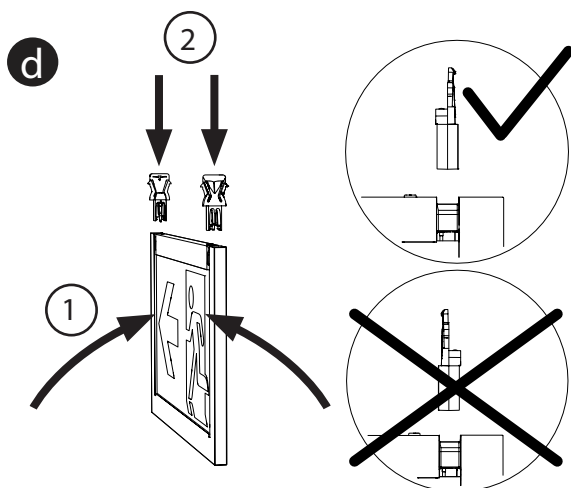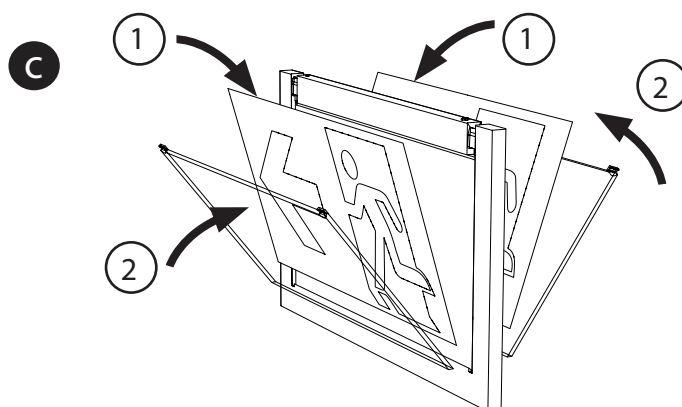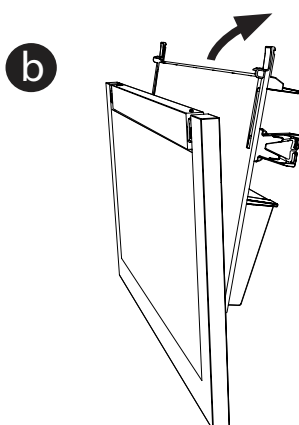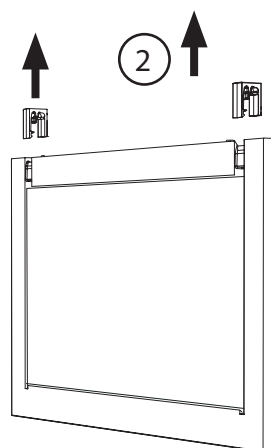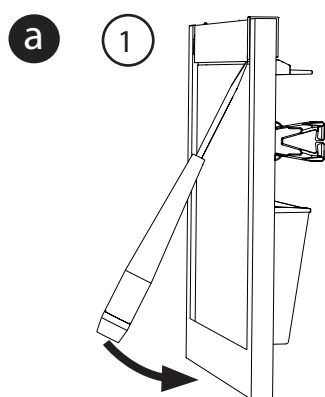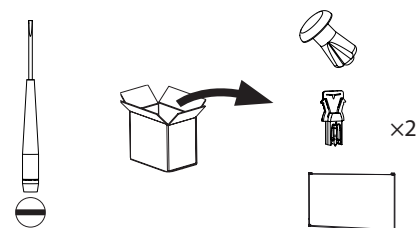

The ceiling-mounting is dedicated to places where the public cannot reach the product.

5


e

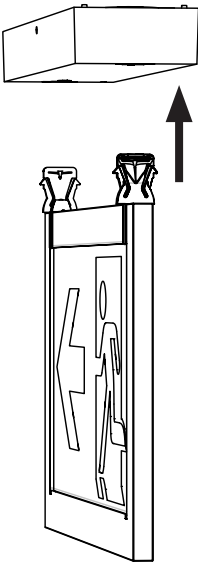


+




-

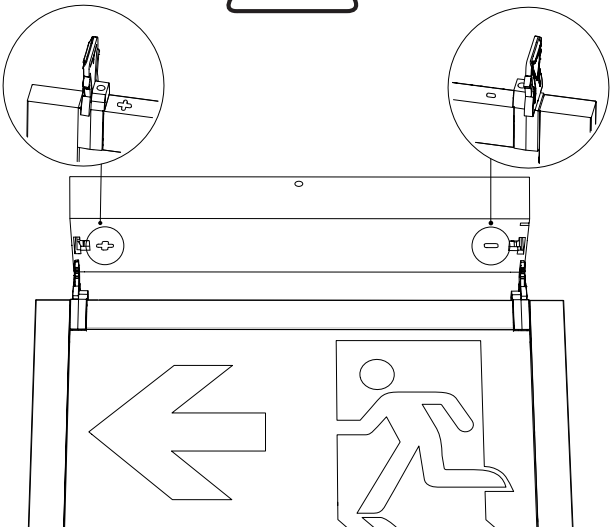



f

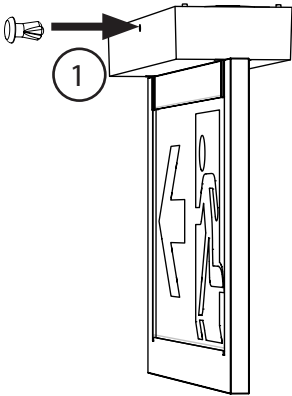

2

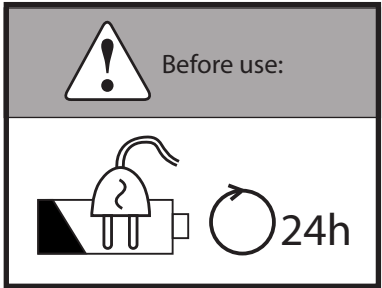


Autotest





Green		OK
Green		Test
Green & yellow		))) com
Yellow	2 s	
Yellow	0,5 s	



Constant Blinking

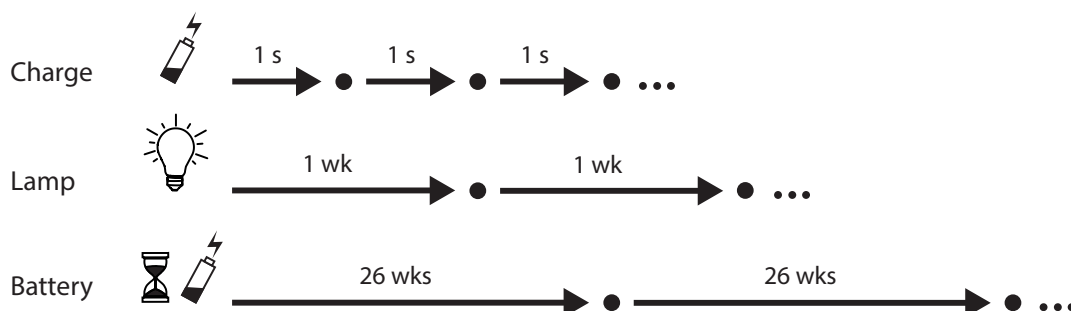

Manual testing and DIM level setting

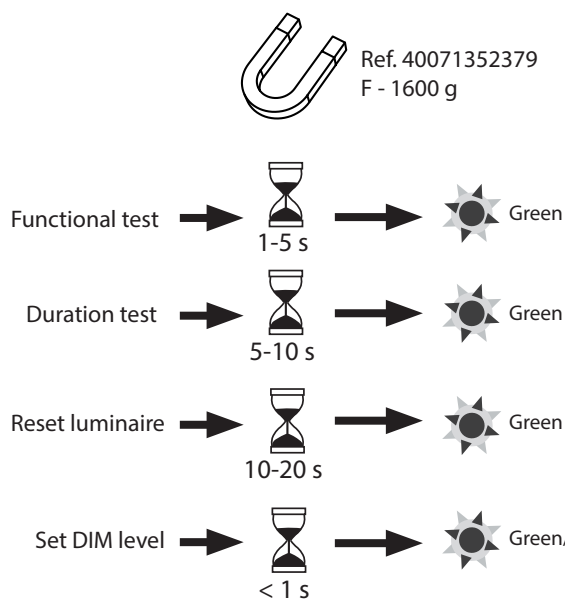


OR



30, 70 or 100 % of L_{max}
where $L_{max} = 50$ or 500 cd/m^2


Initialization of test interval and product configuration

AT mode

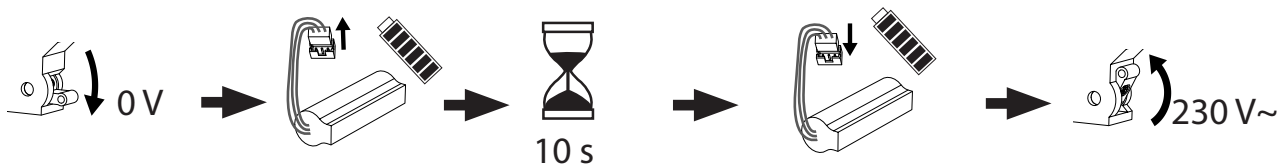

Option CGLine+ web-controller

OR



See manual
40071860241

 To be replaced

CrystalWay 20m CGLine+
(LUM17122)

CrystalWay 30m CGLine+
(LUM17124)


Battery pack 3,6 V/620 mAh Li-Ion
(LUM10568)

Battery pack 3,6V/1240 mAh Li-Ion
(LUM10569)

Diffuser kit 24 LEDs
(LUM10570)

Diffuser kit 38 LEDs
(LUM10571)

4 hooks for
CrystalWay 20/30m
diffuser: LUM10572

			 Battery pack					EN	
CrystalWay20mCGLine+	LUM17122	IP 42 / IK 04	3.6V/620 mAh Li-Ion	LUM10568	1 h / 3 h / 5 h / 8 h	500 cd/m ² 28 × LED 2.9 V 300 mA	230V~/50-60Hz 2.5W/(500cd/m ²) 0.7 W (50 cd/m ²)	EN 60598.1 EN 60598.2.22 EN1838/ISO30061 EN62034	
CrystalWay30mCGLine+	LUM17124	IP 42 / IK 04	3.6V/1240mAh Li-Ion	LUM10569		500 cd/m ² 36 × LED 2.9 V 600 mA	230V~/50-60 Hz 4.2W/(500cd/m ²) 0.9 W (50 cd/m ²)		